

Click here
for the
Samples

Connectors for Smart Helmet



① Any Connection,
Main to Sub module

Standard ZIF
Pitch=0.5mm




FH34 Series

Narrow Hybrid
Width=1.7mm, 5A power



BM28 Series

Standard ZIF
Pitch=0.3mm



FH35C Series

③ Antenna

Standard RF



U.FL(A) Series

Micro coaxial switch



MS-180 Series

④ Interface

USB Type-C
5A Waterproof



CX Series


⑤ Battery

High current
10A power



BM25 Series

Narrow Hybrid
Width=1.5mm, 3A



BM29 Series

Snap Lock, 3A
Height 1.4mm




DF57 Series

Snap Lock, 4A



DF61Y Series

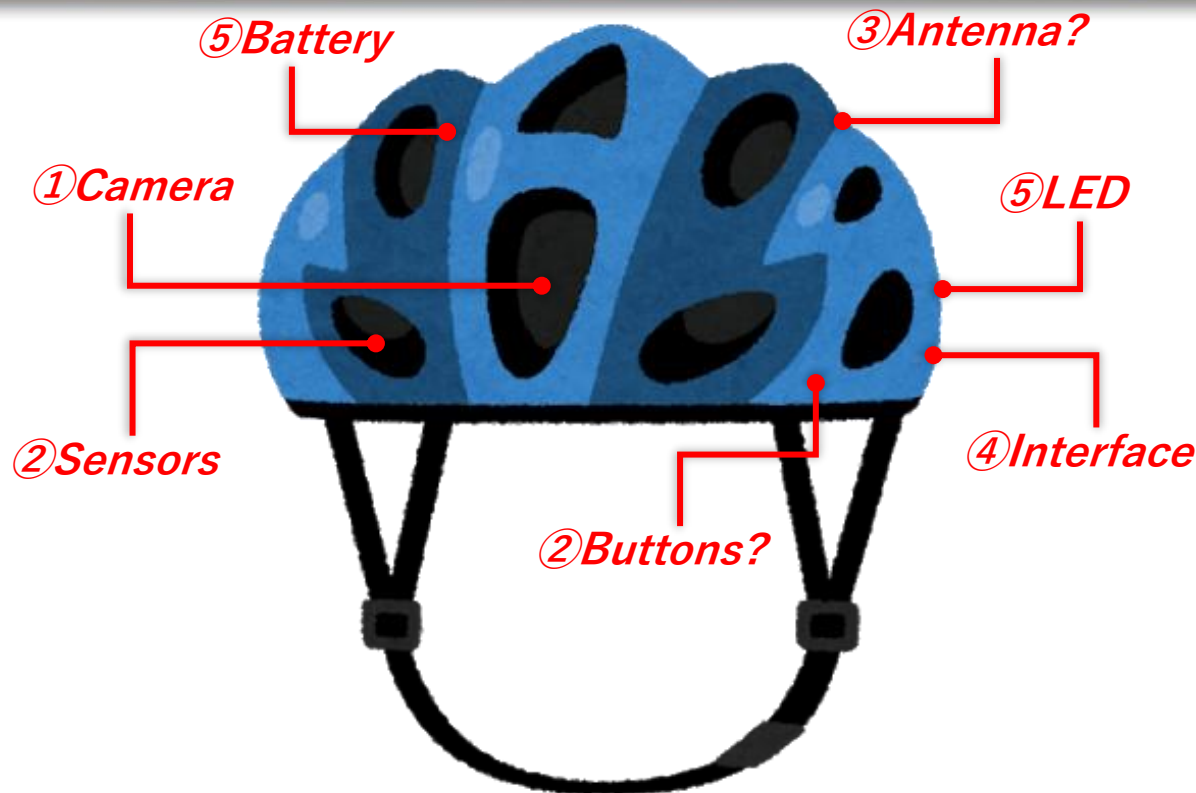

② Buttons, Sensors

Just Insertion
Pitch=0.25/0.3mm



FH62/72 Series

Small+Robust
2.5A



DF52 Series

Low profile ZIF
Height=0.5mm



FH64MA Series

Snap Lock, 3A
Height 1.0mm



DF58 Series

Click on the product for more information