



# Smart Ring Connection


Inside of Ring

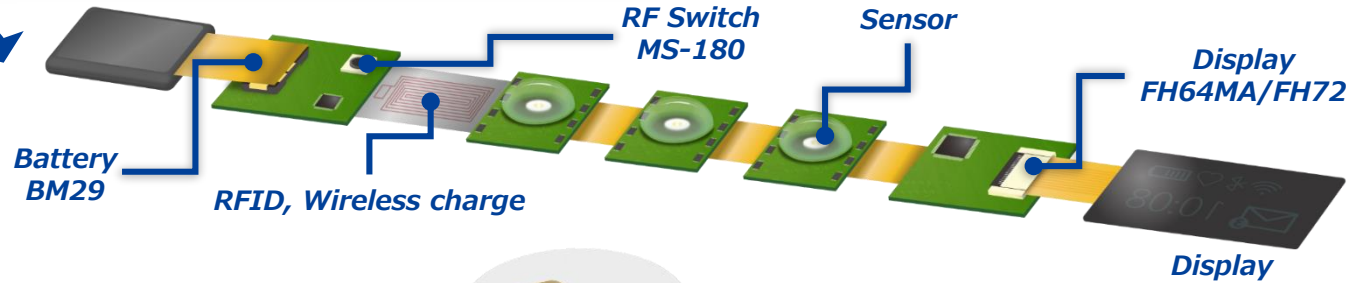

Inside of Charger

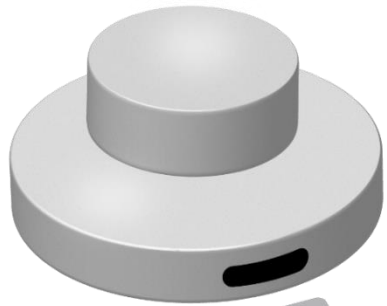


Sub to Main PCB FH72/BM28

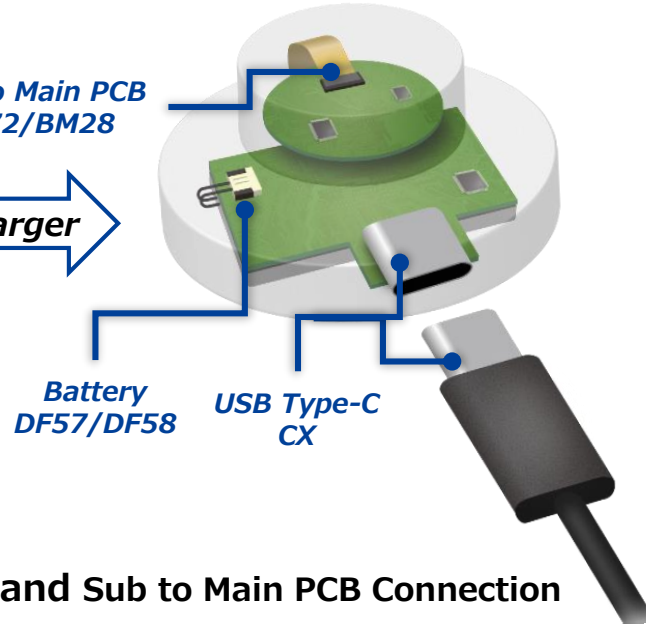

## Battery Connection

Narrow Battery, 3A  
Depth: 1.5mm

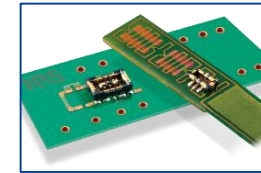

BM29 Series

Snap Lock, 3A



DF57/DF58 Series

## USB Connection

USB Type-C, 6A



CX Series



## Display and Sub to Main PCB Connection

Low Profile ZIF, Height: 0.5mm




FH64MA Series

Just Insertion, Pitch: 0.25/0.3mm



FH62/72 Series


Narrow Hybrid, Depth: 1.7mm

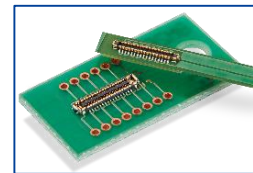

BM28 Series

## RF Switch Connection

RF Switch Height: 0.85mm

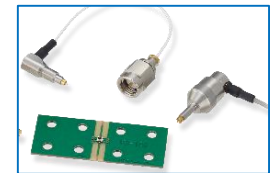

MS-180 Series